




KVALITETA
I POUZDANOST



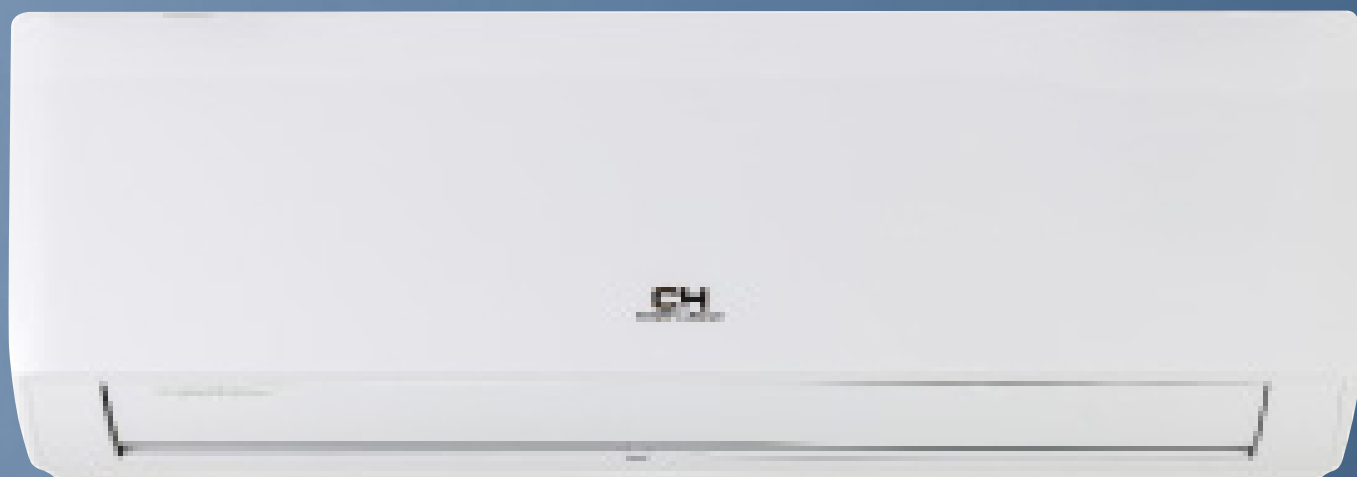

Alfa klima uređaji - klima uređaji koji već nekoliko sezona uživaju u nepomičnoj popularnosti, koristeći ekološki faktor R32. Uređaji koriste sve tehnologije koje se koriste u proizvodnji uređaja vrhunske klase, uključujući CH 7-SKY tehnologiju filtracije, ugrađeni WIFI modul i plazma ionizator.





Hlađenje
Grijanje

-15°C do +43°C
-15°C do +24°C

WI-FI

R32

► **Funkcije**



Inteligentni sustav
odmrzavanja



Vertikalno kretanje
krilaca



Funkcija vrućeg
starta



Funkcija
Turbo



Udoban noćni
način rada



Funkcija tihog
rada



Funkcija
auto-restart



Funkcija
Wi-Fi



Samodijagnoza
jedinice



Više brzina
ventilatora



Tajmer
24h



Blokada
tipkovnice



Funkcija
I FEEL



Ionizator zraka



Filter
CH7 - SKY



Faktor
R32



Samočišćenje
jedinice



Funkcija
I-ACTION



Zagrijavanje
8°C

► Opis funkcija str. 154

► **Daljinski upravljači i dodatna oprema**

STANDARD

OPCIJA



Daljinski upravljač
YAAIFB6 (Wi-Fi)




Daljinski upravljač
YAGIFB2 (Wi-Fi)
Dla 24



Žični daljinski
upravljač
XK76



* Žični daljinski
upravljač
CE50-24/E



* Centralni daljinski
upravljač
CE52-24/F



Upravljački modul
On/Off
MK010

* Za spajanje središnjeg kontrolera CE52-24 / F ili CE50-24 / E potreban je XK76 zidni kontroler za svaku jedinicu

MODEL			CH-S09FTXE-NG	CH-S12FTXE-NG	CH-S18FTXE-NG	CH-S24FTXL2E-NG
Snaga		V ~ Hz/faza	220-240V~50Hz/1 faza			
Hlađenje	Rashladni učin (min-max)	kW	2.60 (0.50-3.35)	3.50 (0.60-3.60)	4.60 (0.65-5.20)	7.00 (1.93-8.85)
	Potrošnja el. energije (min-max)	W	805 (160-1400)	997 (120-1400)	1430 (150-1700)	1900 (570-3100)
	Struja rada	A	3.90	4.42	6.30	8.73
	EER	W/W	3.23	3.21	3.22	3.68
	Godišnja potrošnja energije	kWh/rok	143	184	264	377
	SEER	W/W	6.10	6.10	6.10	6.50
	Energetska klasa		A++	A++	A++	A++
Grijanje	Učin grijanja (min-max)	kW	2.80 (0.50-3.50)	3.60 (0.60-3.80)	5.20 (0.70-5.48)	7.40 (2.00-9.20)
	Potrošnja el. energije (min-max)	W	755 (200-1500)	970 (120-1500)	1400 (160-1600)	1897 (530-3750)
	Struja rada	A	3.40	4.30	6.20	8.84
	COP	W/W	3.71	3.61	3.71	3.90
	Godišnja potrošnja energije	kWh/rok	910	1120	1260	2240
	SCOP	W/W	4.00	4.00	4.00	4.00
	Energetska klasa		A+	A+	A+	A+
Komunikacija Wi-Fi		+/-	+	+	+	+
UNUTARNJA JEDINICA						
Dimenzije (Š. x D. x V.)		mm	790x200x275	790x200x275	970x225x300	1078x246x325
Transportne dimenzije (Š x D x V)		mm	863x268x352	863x268x352	1038x305x380	1145x335x410
Neto / bruto težina		kg	9.0/11.0	9.0/11.0	13.5/16.5	16.5/20.0
Protok zraka		m³/h	330/430/490/560	282/480/330/560	520/610/720/850	850/950/1050/1250
Razina zvučnog tlaka		dB(A)	23/26/30/36	24/28/32/37	28/33/39/45	30/34/39/44
VANJSKA JEDINICA						
Dimenzije (Š. x D. x V.)		mm	782x320x540	848x320x596	848x320x596	963x396x700
Transportne dimenzije (Š x D x V)		mm	820x355x580	878x360x630	878x360x630	1026x455x735
Neto / bruto težina		kg	29.5/32.0	31.0/34.0	34.0/37.0	53.0/57.5
Protok zraka		m³/h	1600	2200	2200	3200
Razina zvučnog tlaka		dB(A)	52	52	54	57
Cijevi za hlađenje	Tekućina / plin	mm(cal)	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø15.9 (1/4"/5/8")
	Količina rashladnog sredstva	kg	0.60	0.59	0.77	1.70
	Dodatna količina faktora	g/m	16	20	16	50
	Standardna duljina ugradnje	m	5	5	5	5
	Maksimalna duljina	m	19	20	20	25
	Najveća visinska razlika	m	10	10	10	10
	Preporučene električne žice i zaštite	Pogon jedinica / presjek	mm²	izvana / 3x2.5	izvana / 3x2.5	izvana / 3x2.5
Komunikacija		mm²	4x1.0	4x1.0	4x1.0	4x1.0
Sigurnost		A	10	16	16	16
Rasponi radne temperature jedinice vanjski: hlađenje / grijanje		°C	-15~-43/-15~-24	-15~-43/-15~-24	-15~-43/-15~-24	-15~-43/-25~-24



UNUTARNJA JEDINICA

Dimenzije (Š. x D. x V.)	mm	790x200x275	790x200x275	970x225x300	1078x246x325
Transportne dimenzije (Š x D x V)	mm	863x268x352	863x268x352	1038x305x380	1145x335x410
Neto / bruto težina	kg	9.0/11.0	9.0/11.0	13.5/16.5	16.5/20.0
Protok zraka	m³/h	330/430/490/560	282/480/330/560	520/610/720/850	850/950/1050/1250
Razina zvučnog tlaka	dB(A)	23/26/30/36	24/28/32/37	28/33/39/45	30/34/39/44

VANJSKA JEDINICA




Dimenzije (Š. x D. x V.)		mm	782x320x540	848x320x596	848x320x596	963x396x700
Transportne dimenzije (Š x D x V)		mm	820x355x580	878x360x630	878x360x630	1026x455x735
Neto / bruto težina		kg	29.5/32.0	31.0/34.0	34.0/37.0	53.0/57.5
Protok zraka		m³/h	1600	2200	2200	3200
Razina zvučnog tlaka		dB(A)	52	52	54	57
Cijevi za hlađenje	Tekućina / plin	mm(cal)	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø15.9 (1/4"/5/8")
	Količina rashladnog sredstva	kg	0.60	0.59	0.77	1.70
	Dodatna količina faktora	g/m	16	20	16	50
	Standardna duljina ugradnje	m	5	5	5	5
	Maksimalna duljina	m	19	20	20	25
	Najveća visinska razlika	m	10	10	10	10
Preporučene električne žice i zaštite	Pogon jedinica / presjek	mm²	izvana / 3x2.5	izvana / 3x2.5	izvana / 3x2.5	izvana / 3x2.5
	Komunikacija	mm²	4x1.0	4x1.0	4x1.0	4x1.0
	Sigurnost	A	10	16	16	16
Rasponi radne temperature jedinice vanjski: hlađenje / grijanje		°C	-15~43/-15~24	-15~43/-15~24	-15~43/-15~24	-15~43/-25~24

UNUTARNJA JEDINICA

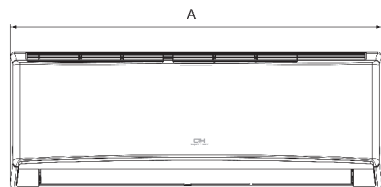

Model	A (Š.)	B (D.)	C (V.)
CH-S09FTXE-NG	790	275	200
CH-S12FTXE-NG	790	275	200
CH-S18FTXE-NG	970	300	225
CH-S24FTXL2E-NG	1078	325	246

VANJSKA JEDINICA



Model	A (szer.)	B (wys.)	C (głęb.)	DxE (rozstaw)
CH-S09FTXE-NG	782	540	320	510x286
CH-S12FTXE-NG	848	596	320	540x286
CH-S18FTXE-NG	848	596	320	540x286
CH-S24FTXL2E-NG	963	700	396	560x364