



VITAL



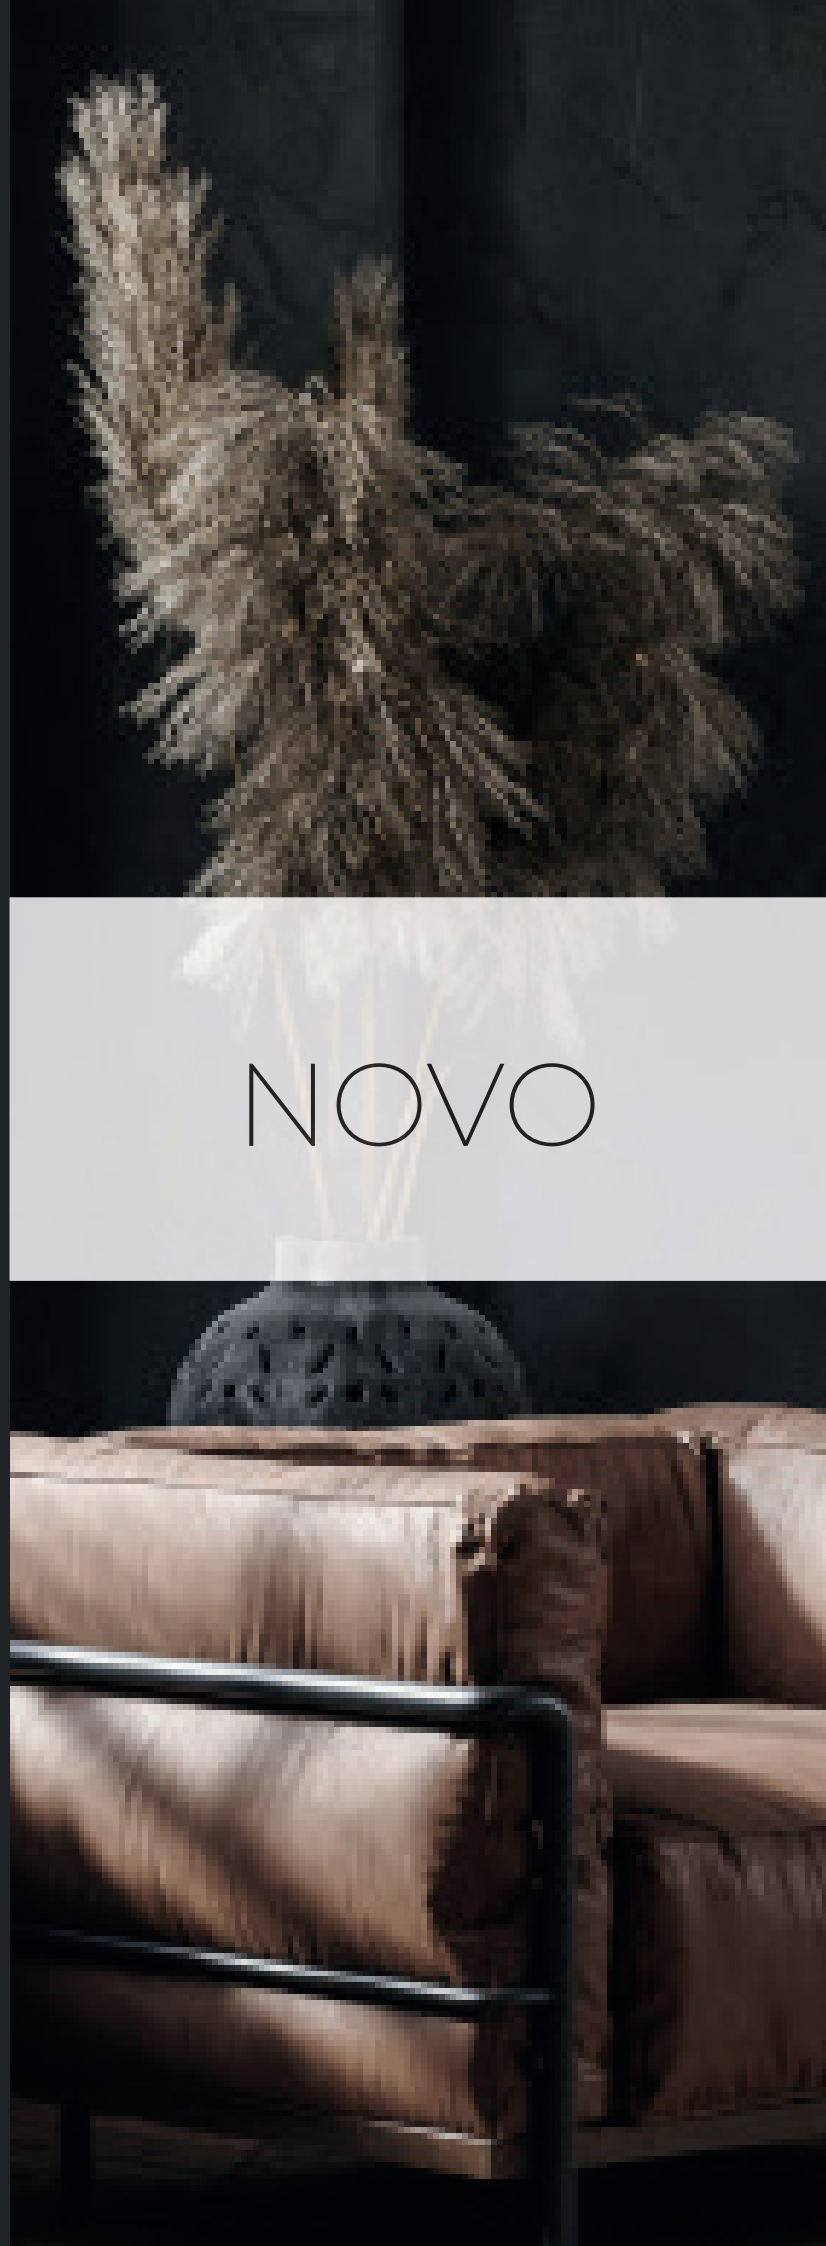

Vital - zidni klima uređaj nove generacije s minimalističkom bijelom pločom. Uređaj koristi rashladno sredstvo R32. Zidni klima uređaj serije Vital ima sve značajke dostupne na tržištu iz premium PROGRAMA. Opremljen je CH 7-SKY tehnologijom filtracije, ugrađenim WiFi modulom i ionizatorom plazme.

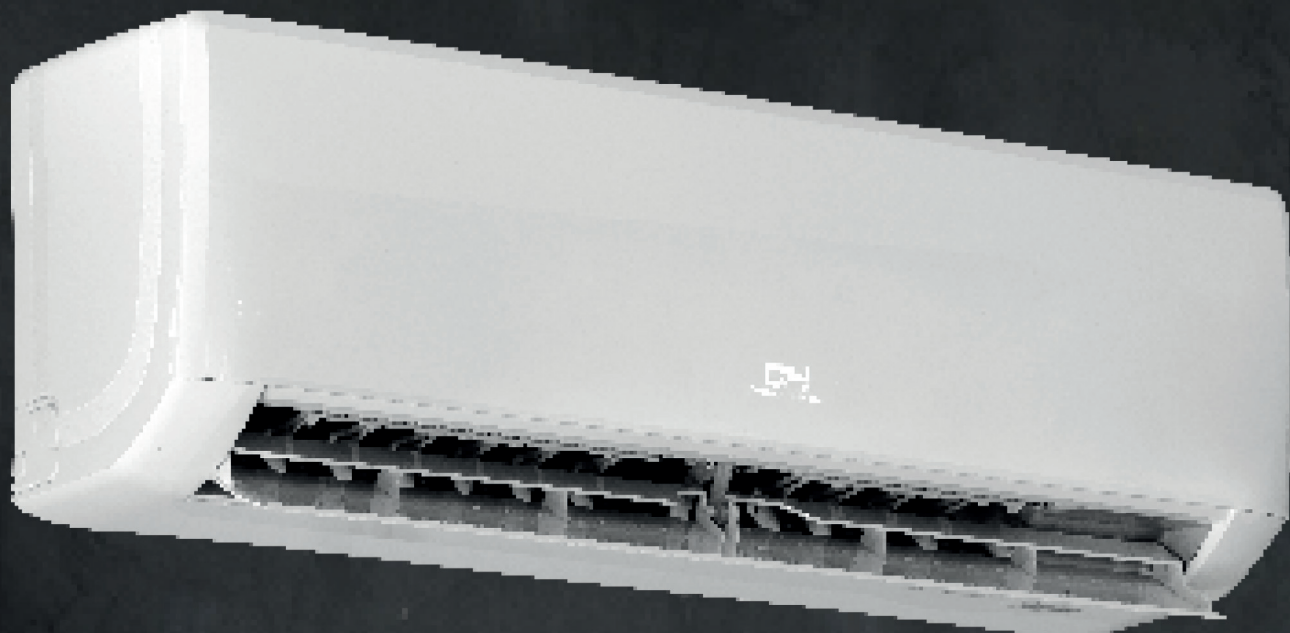



Hlađenje
Grijanje

-15°C do +43°C
-15°C do +24°C

WI-FI

R32

► Funkcije



Inteligentni sustav
odmrzavanja



Vertikalno kretanje
krilaca



Funkcija vrućeg
starta



Funkcija
Turbo



Udobni noćni
način rada



Funkcija tihog
rada



Funkcija
auto-restart



Funkcija
Wi-Fi



Samodijagnoza
jedinice



Više brzina
ventilatora



Tajmer
24h



Blokada
tipkovnice



Funkcija
I FEEL



Ionizator
zraka



Filter
CH7 - SKY



FAKTOR
R32



Samочишćenje
jedinice



Funkcija
I-Action



Zagrijavanje
8°C

► Opis funkcija str. 154

► Specifikacije

Vital - klima uređaj nove generacije koji koristi ekološki učinkovito rashladno sredstvo R32.

Zidni klima uređaj serije Vital ima sve značajke dostupne na tržištu iz premium uređaja. Opremljen je CH 7-SKY tehnologijom filtracije, ugrađenim WiFi modulom i ionizatorom plazme.



► Daljinski upravljač


STANDARD



Daljinski upravljač
YAPIF6


MODEL			CH-S09FTXF-NG	CH-S12FTXF-NG	CH-S18FTXF-NG	CH-S24FTXF-NG
Snaga		V~Hz/faza	220-240V~50Hz/1 faza			
Hlađenje	Rashladni učin (min-max)	kW	2.50 (0.50-3.35)	3.20 (0.60-3.60)	4.60 (0.65-5.20)	6.16 (2.00-8.20)
	Potrošnja el. energije (min-max)	W	780 (160-1400)	990 (160-1400)	1430 (160-1700)	1760 (160-2500)
	Struja rada	A	3.99	4.50	6.30	7.70
	EER	W/W	3.20	3.21	3.22	3.50
	Godišnja potrošnja energije	kWh/rok	143	184	264	350
	SEER	W/W	6.10	6.10	6.10	6.10
	Energetska klasa		A++	A++	A++	A++
Grijanje	Učin grijanja (min-max)	kW	2.80 (0.50-3.30)	3.40 (0.60-3.80)	5.20 (0.70-5.40)	6.45 (2.00-8.50)
	Potrošnja el. energije (min-max)	W	780 (200-1500)	940 (200-1500)	1400 (200-1600)	1860 (200-2600)
	Struja rada	A	3.74	4.40	6.20	8.10
	COP	W/W	3.60	3.61	3.71	3.47
	Godišnja potrošnja energije	kWh/rok	910	1120	1260	1645
	SCOP	W/W	4.00	4.00	4.00	4.00
	Energetska klasa		A+	A+	A+	A+
Komunikacija Wi-Fi		+/-	+	+	+	+
UNUTARNJA JEDINICA						
Dimenzije (Š. x D. x V.)		mm	773x185x250	773x185x250	970x225x300	970x225x300
Transportne dimenzije (Š x D x V)		mm	817x244x306	817x244x306	1017x285x366	1017x285x366
Neto / bruto težina		kg	8.5/9.5	8.5/9.5	13.5/16.5	13.5/16.5
Protok zraka		m³/h	300/430/500/550	300/430/500/550	520/610/720/850	520/610/720/850
Razina zvučnog tlaka		dB(A)	23/26/30/37	23/26/30/37	28/33/39/45	28/33/39/45
VANJSKA JEDINICA						
Dimenzije (Š. x D. x V.)		mm	782x320x540	848x320x596	848x320x596	965x396x700
Transportne dimenzije (Š x D x V)		mm	820x355x580	878x360x630	878x360x630	1026x455x735
Neto / bruto težina		kg	29.5/32.0	31.0/34.0	34.0/37.0	49/50.5
Protok zraka		m³/h	1600	2200	2200	3200
Razina zvučnog tlaka		dB(A)	52	52	54	55
Cijevi za hlađenje	Tekućina / plin	mm(cal)	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø9.52 (1/4"/3/8")	Ø6.35/Ø15.9 (1/4"/5/8")
	Količina rashladnog sredstva	kg	0.60	0.65	0.77	1.30
	Dodatna količina faktora	g/m	20	20	20	20
	Standardna duljina ugradnje	m	5	5	5	5
	Maksimalna duljina	m	15	20	20	20
	Najveća visinska razlika	m	10	10	10	10
Preporučene električne žice i zaštite	Pogon jedinica / presjek	mm²	izvana / 3x2.5	izvana / 3x2.5	izvana / 3x2.5	izvana / 3x2.5
	Komunikacija	mm²	4x1.0	4x1.0	4x1.5	4x1.5
	Sigurnost	A	10	10	16	16
Rasponi radne temperature jedinice vanjski: hlađenje / grijanje		°C	-15~43/-15~24	-15~43/-15~24	-15~43/-15~24	-15~43/-15~24

UNUTARNJA JEDINICA

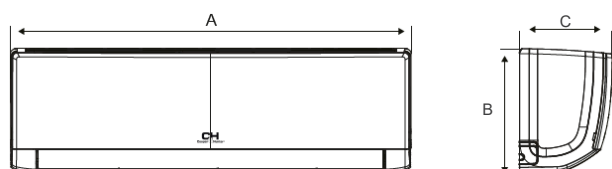

Model	A (Š.)	B (D.)	C (V.)
CH-S09FTXF-NG	773	250	185
CH-S12FTXF-NG	773	250	185
CH-S18FTXF-NG	970	300	225
CH-S24FTXF-NG	970	300	225

VANJSKA JEDINICA

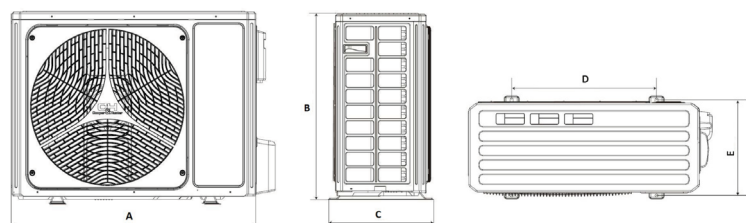

Model	A (Š.)	B (D.)	C (V.)	DxE (razmak)
CH-S09FTXF-NG	782	540	320	510x286
CH-S12FTXF-NG	848	596	320	540x286
CH-S18FTXF-NG	848	596	320	540x286
CH-S24FTXF-NG	965	700	396	560x364